

Basic Capacitors (three-phase)

Type LKT ...-DB for 50 Hz / 60 Hz


Article- No.	Type	Capacitance [μF]	Rated Reactive Power in kvar at Rated Voltage (V _N) 50 Hz / 60 Hz									Rated current at V _N 50 Hz / 60 Hz [A]	Dimensions (d x h) Weight (net)
			230V	250V	300V	400V	415V	440V	460V	480V	525V		[mm] [kg]
31-10404	LKT 6.25-440-DB	3 x 34.3	1.7 2.0	2.0 2.4	2.9 3.5	5.2 6.2	5.6 6.7	6.25 7.5				8.2 9.8	60 x 150 0.550
31-10412	LKT 10-440-DB	3 x 54.8	2.7 3.33	3.2 3.9	4.7 5.6	8.33 9.9	8.9 10.7	10.0 12.0				13.1 15.7	60 x 225 0.800
31-10379	LKT 12.5-440-DB	3 x 68.5	3.4 4.1	4.0 4.8	5.8 7.0	10.3 12.4	11.1 13.3	12.5 15.0				16.4 19.7	70 x 225 1.050
31-10406	LKT 15-440-DB	3 x 82.2	4.1 4.9	4.8 5.8	7.0 8.4	12.4 14.9	13.3 16.0	15.0 18.0				19.7 23.6	70 x 225 1.050
31-10413	LKT 20-440-DB	3 x 109.6	5.5 6.66	6.5 7.8	9.3 11.2	16.5 19.8	17.8 21.4	20.0 24.0				26.2 31.5	85 x 278 1.850
31-10407	LKT 25-440-DB	3 x 137.0	6.8 8.2	8.1 9.7	11.6 14.0	20.7 24.8	22.2 26.7	25.0 30.0				32.8 39.4	85 x 278 1.850
31-10408	LKT 30-440-DB	3 x 164.4	8.2 9.8	9.7 11.6	14.0 16.7	24.8 29.8	26.7 32.0	30.0 36.0				39.4 47.2	85 x 278 1.850

Premium Capacitors (three-phase)

Type LKT ...-DL for 50 Hz / 60 Hz

Article-No.	Type	Capacitance [μF]	Rated Reactive Power in kvar at Rated Voltage (V _N) 50 Hz / 60 Hz									Rated current at V _N 50 Hz / 60 Hz [A]	Dimensions (d x h) Weight (net)
			230V	400V	415V	440V	460V	480V	525V	570V	615V		[mm] [kg]
31-10613	LKT 3.6-480-DL	3 x 16.6	0.8 1.0	2.5 3.0	2.7 3.2	3.0 3.6	3.33 4.0	3.6 4.3	4.3* 5.2*			4.3 5.2	60 x 150 0.550

Dimensions

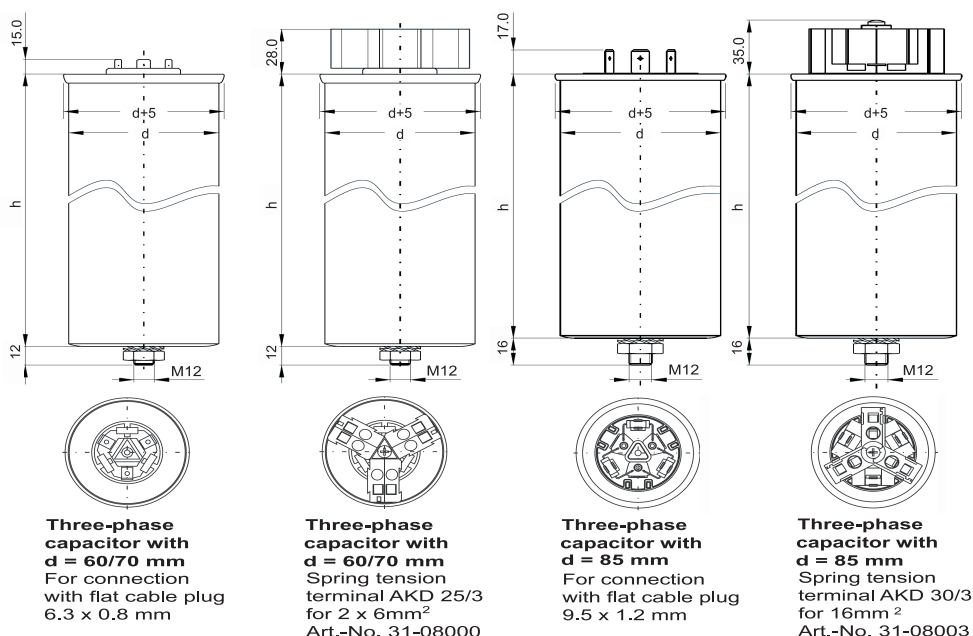

ENGINEERS & MFG. CO. LTD.

Manufacturer of Electrical Substation Equipments.

TAN Engineering Enterprise

A Sister Concern of Desh Engineers & Mfg. Co. Ltd.

Office Address : Zaman Villa (Flat # A-1), House # 05, Road # 01, Block # D, Pallabi, Dhaka-1216, Bangladesh.

Contact No. : Tel.: 02-9006340, Hotline : 01777-399383, Email : desh.enggs@gmail.com, info@deshengineers.com

Website : www.deshengineers.com, www.frako.com

For more information please visit : www.frako.com